

02/28/00
Jc780 U.S. PTO

2-29-00

A

Jc564 U.S. PTO
09/513937
02/28/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of: Scott Sarnikowski et al.
Title: SERVICE DELIVERY UNIT FOR AN ENTERPRISE NETWORK
Attorney Docket No.: 500.719US2

PATENT APPLICATION TRANSMITTAL

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

We are transmitting herewith the following attached items and information (as indicated with an "X"):


- X **CONTINUATION** of prior Patent Application No. 09/342,682 (under 37 CFR § 1.53(b)) comprising:
X Specification (22 pgs, including claims numbered 1 through 21 and a 1 page Abstract).
X Formal Drawing(s) (4 sheets).
X Unsigned Combined Declaration and Power of Attorney (5 pgs).
X Preliminary Amendment (1 pgs).
X Return postcard.

The filing fee has been calculated below as follows:

	No. Filed	No. Extra	Rate	Fee
TOTAL CLAIMS	21 - 20 =	1	x 18 =	\$18.00
INDEPENDENT CLAIMS	4 - 3 =	1	x 78 =	\$78.00
MULTIPLE DEPENDENT CLAIMS PRESENTED				\$0.00
BASIC FEE				\$690.00
TOTAL				\$786.00

THE FILING FEE WILL BE PAID UPON RECEIPT OF THE NOTICE TO FILE MISSING PARTS

SCHWEGMAN, LUNDBERG, WOESSNER & KLUTH, P.A.
P.O. Box 2938, Minneapolis, MN 55402 (612-373-6900)

By: 
Atty: David N. Fogg
Reg. No. 35,138

Customer Number 21186

"Express Mail" mailing label number: EL467292584US

Date of Deposit: February 28, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

By: Shawn L. Hise

Signature: 

S/N Unknown

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Scott Sarnikowski et al.	Examiner:	Unknown
Serial No.:	Unknown	Group Art Unit:	Unknown
Filed:	Herewith	Docket:	500.719US2
Title:	SERVICE DELIVERY UNIT FOR AN ENTERPRISE NETWORK		

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

When the above-identified patent application is taken up for consideration, please amend the application as follows:

IN THE SPECIFICATION


On page 1, under the title, please insert the sentence --This application is a continuation of U.S. Serial No. 09/342,682 filed June 29, 1999--.

Respectfully submitted,

SCOTT SARNIKOWSKI ET AL.

By their Representatives,

SCHWEGMAN, LUNDBERG, WOESSNER & KLUTH, P.A.
P.O. Box 2938
Minneapolis, MN 55402
(612) 373-6920

Date February 28, 2000 By 
David N. Fogg
Reg. No. 35,138

"Express Mail" mailing label number: EL467292584US

Date of Deposit: February 28, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

By: Shawn L. Hise

Signature: 

UNITED STATES PATENT APPLICATION

Service Delivery Unit For an Enterprise Network

INVENTORS

Scott Sarnikowski
Anirudha Chinmulgund
Sanjay Ravindra
Manoj Kulkarni
Anil Lakhwara
John Litster
Harikrishin W. Hirani

Schwegman, Lundberg, Woessner, & Kluth, P.A.
1600 TCF Tower
121 South Eighth Street
Minneapolis, Minnesota 55402
ATTORNEY DOCKET 500.719US1

Service Delivery Unit for Enterprise Network

Technical Field of the Invention

The present invention relates generally to the field of telecommunications and,
5 in particular, to a service delivery unit for enterprise network.

Background

In recent years, computers have become a commonplace part of life for large
segments of society. Many businesses and institutions rely on vast internal networks
10 to share data among geographically dispersed users within their organization. These
networks are referred to as "enterprise networks." Generally, an enterprise network is
a geographically dispersed network under the jurisdiction of a single organization. It
often includes several different types of local area networks (LANs) and computer
systems from different vendors.

15 Typically, geographically dispersed users on an enterprise LANs communicate
with each other over wide area network (WAN) connections provided by one or more
WAN service providers. Most common method of connection to WAN is using
digital telecommunication trunks; such as T1, T3, OC-1 etc for North America and
equivalent trunks for other countries.

20 Conventionally, a point of demarcation is provided at the connection between
the enterprise network and the WAN to ensure safety and a clear separation of support
responsibility by monitoring the health of the physical connection. In early systems, a
channel service unit (CSU) provided the demarcation between voice centric enterprise
and the WANs. In later systems, digital service units (DSUs) were developed to
25 provide the point of demarcation between data centric enterprise networks and the
WANs. A typical DSU includes a WAN port, a high-speed data port, such as V.35,
for communicating with enterprise LAN equipment and additional ports for supporting
enterprise voice requirements.

As Frame Relay service started to proliferate, monitoring capabilities in the
30 DSU were enhanced to support Service Level Agreements (SLAs) between the

enterprise consumer and the service providers. With the IP protocol taking over most of the enterprise networks, DSUs are starting to support monitoring of higher layers, such as protocols and applications.

WAN expenditure has always been a major component of an enterprise budget.

- 5 IT managers are very sensitive of this issue and keep a tight control on the WAN bandwidth usage. Typically, an enterprise network acquires WAN bandwidth by contract with a service provider. For example, the enterprise network obtains a number of permanent virtual connections (PVCs) with appropriate service commitments (also called Service Level Agreements or SLA characteristics) which are
10 necessary to meet enterprise needs.

- With the recent information explosion, including the popularity of the Internet, the typical enterprise network carries data for both business and personal purposes. Most networks carry this mix of data indiscriminately. Unfortunately, mission critical applications for the enterprise may be compromised because less critical applications,
15 e.g., personal web surfing, leave only a small portion of the contracted bandwidth unused at the time of a critical request.

- For the reasons stated above, and for other reasons stated below which will become apparent to those skilled in the art upon reading and understanding the present specification, there is a need in the art for a method and system for allocating
20 bandwidth of a wide area network appropriately for use by an enterprise network.

Summary

- The above-mentioned problems with WAN bandwidth utilization by enterprise networks and other problems are addressed by the present invention and will be
25 understood by reading and studying the following specification. Embodiments of the present invention provide a flexible modular service delivery architecture that provides the traditional DSU demarcation functionality along with capabilities to classify, monitor and manage bandwidth usage on per user and/or application basis to meet enterprise needs. This is achieved through application level queuing and flow

control, mapping of traffic to appropriate service delivery media and methods based on delivery characteristics (such as committed information rate (CIR), delay and latency), and packet/traffic labeling for getting service priority within service provider network. Embodiments of the present invention also support bandwidth management based on business policies; such as Web Browsing should not exceed 64 KBPS and should be done over low CIR connection to the WAN. In one embodiment, a policy server is provided to allow an enterprise's system administrator to define global multi-site bandwidth usage policies using user-friendly Graphical User Interface (GUI) and those policies are pulled by individual service delivery units on per need basis. The policies stored on the server are used to determine, for example, the amount and type of bandwidth to allocate to a user, a group of users or an application.

Brief Description of the Drawings

Figure 1 is a block diagram of an embodiment of an enterprise network constructed according to the teachings of the present invention.

Figure 2 is a block diagram of an embodiment of a service delivery unit constructed according to the teachings of the present invention.

Figure 3 is a flow chart that illustrates an embodiment of a process for processing packets in a service delivery unit according to the teachings of the present invention.

Figure 4 is a flow chart that illustrates an embodiment of a process for processing packets in a service delivery unit according to the teachings of the present invention.

Detailed Description

The following detailed description refers to the accompanying drawings which form a part of the specification. The drawings show, and the detailed description describes, by way of illustration specific illustrative embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to

enable those skilled in the art to practice the invention. Other embodiments may be used and logical, mechanical and electrical changes may be made without departing from the scope of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense.

5

I. Enterprise Network

Figure 1 is a block diagram of an embodiment of an enterprise network, indicated generally at 100, and constructed according to the teachings of the present invention. In enterprise network 100 users at geographically separate locations 150, 151, and 152 may be connected over wide area network 102, e.g., Frame Relay, ATM or other network capable of similar services. Enterprise network 100 also includes service delivery units 108, 109 and 170. Service delivery units 108, 109 and 170 control access to wide area network 102 for the users in locations 150, 151, and 152, respectively, in enterprise network 100. Service delivery units 108, 109, and 170 each provide the following functionality:

1. Demarcates the interface between local networks and wide area network 102; and
2. Monitors of enterprise network 100 at the physical and link layers.

In addition to these functions, service delivery units 108, 109, and 170 also provide a bandwidth management function for enterprise network 100. The bandwidth management function consists of at least three components:

1. Protocol and application level queuing and flow control,
2. Mapping of application and/or user specific traffic to appropriate service delivery media and methods based on delivery characteristics (such as CIR, delay and latency), and
3. Packet/traffic labeling for getting service priority within service provider network.

This bandwidth management function is managed through policies for enterprise network 100 stored in policy server 110. Advantageously, by managing

access to bandwidth in wide area network 102 at service delivery units 108, 109 and 170 based on global policies, enterprise network 100 is able to assure that sufficient bandwidth in wide area network 102 can be allocated to users when high priority mission critical requests are received.

5 Enterprise network 100 includes a number of local area networks that are located in geographically different locations. In the embodiment of Figure 1, enterprise network 100 includes local area networks in three different locations 150, 151, and 152. However, it is understood that enterprise network 100 can include any appropriate number of locations to meet the communications needs of the enterprise.

10 Location 150 includes local area networks 104-1, . . . , 104-N, location 151 includes local area networks 173-1, . . . , 173-K, and location 152 includes local area networks 106-1, . . . , 106-M.

Enterprise network 100 includes at least one permanent virtual connection through wide area network 102 between each one of the locations 150, 151 and 152.

15 These connections are identified as connections A, B, and C. For example, connection A couples router 114 in location 150 through service delivery unit 108 with router 171 in location 151 through service delivery unit 170. Similarly, connection B couples router 114 in location 150 through service delivery unit 108 with router 118 in location 152 through service delivery unit 109. Finally, connection
20 C couples router 171 in location 151 through service delivery unit 170 with router 118 in location 152 through service delivery unit 109.

At each location 150, 151, and 152, the local area networks are coupled to the router through a concentrator, hub, switch, or other piece of equipment that allows a number of local area networks to be connected to a service delivery unit. For
25 example, local area networks 104-1, . . . , 104-N are coupled to at least one data port of service delivery unit 108 by router 114 and hub or switch 112. Similarly, local area networks 106-1, . . . , 106-M are coupled to at least one data port of service delivery unit 109 by router 118 and hub or switch 116. Finally, local area networks

173-1, . . . , 173-K are coupled to at least one data port of service delivery unit 170 by router 171 and hub or switch 172.

It is noted that routers 114, 116 and 172 are optional in that the functionality of routers 114, 116, and 172 can be incorporated into service delivery units 108, 109 and 170, respectively. Service delivery units 108, 109, and 170 are coupled to wide area network 102 through a network interface port over, for example, one or more permanent virtual connections implemented on T1, E1 or other appropriate communication links.

Policy server 110 stores a number of global policies in electronic format on, e.g., a server, disc or other computer readable medium. Policy server 110 is coupled to service delivery units 108, 109 and 110 through a logical policy server port. Physically, the connection may be accomplished over the network interface port, an Ethernet port or other appropriate physical interface of service delivery units 108, 109, and 170. The policies provide rules for allowing access to bandwidth in wide area network 102 for users on local area networks 104-1, . . . , 104-N and 106-1, . . . , 106-N. For example, the policies may include relative priority of different kinds of uses for the bandwidth. This could include ranking of different uses and even blocking out some uses of the bandwidth. For example, Internet access may be set at a low-level priority with particular web sites completely blocked out. Other policies may establish higher priority for mission critical functions such as access to selected corporate databases. Further, the policies can also provide the type or amount of bandwidth that can be allocated to particular types of requests. Other appropriate policies can be stored on policy server 110 to provide rules for allocating the bandwidth in wide area network 102 to users of the enterprise network so as to reduce the likelihood that congestion in wide area network 102 will slow down or reduce the speed of mission critical applications.

In the embodiment shown in Figure 1, each connection between service units 108, 109, and 170 is shown as three connections. Each of the connections between two service units may provide different quality and/or quantity of bandwidth, e.g.,

low, medium and high quality. Service units 108, 109 and 170 can route data onto the connections based on global policies as discussed above. The use of multiple connections advantageously allows the use of "service mapping" in enterprise network 100. Service mapping is a technique for matching WAN usage against available quality and quantity of WAN links. In case of multiple WAN links between two sites that have different SLAs. Service delivery units 108, 109, and 170 dynamically determine the type of traffic, match the traffic with an appropriate WAN link (based on appropriate SLA) per defined policies and then allocate bandwidth on that WAN link. For example, service delivery unit 108 may match mission critical SAP traffic on a high quality WAN link and place non-mission critical electronic mail traffic on low quality WAN link. This technique also allows abstraction of WAN connection type from the traffic classification and bandwidth control components of the service delivery unit. This approach allows service delivery units to support multiple WAN type interfaces without impacting traffic classification and control functionality of the product.

In the embodiment shown in Figure 1, a single policy server is provided for enterprise network 100. Service delivery units 108, 109 and 170 are coupled to policy server 110. The connections between policy server 110 and service delivery units 108, 109 and 170 can be accomplished in a number of ways. For example, service delivery units 108, 109 and 170 can communicate with policy server 110 locally or over a secure connection in wide area network 102. Alternatively, other conventional communication links can be established between policy server 110 and service delivery units 108, 109 and 170. In other embodiments, more than one policy server can be used to provide backup. Policy server 110 can be co-located at a site of one of the service delivery units 108, 109, or 170. Alternatively, policy server 110 can be located at another location independent of the location of the service delivery units 108, 109, and 170 so long as accessibility is maintained for the service delivery units 108, 109, and 170.

Service delivery units 108, 109, and 170 include local decision points (LDPs) 122, 121, and 123, respectively. Local decision points 122, 121, and 123 communicate with policy server 110, as needed, and cache policies from policy server 110. Local decision points 122, 121, and 123 use the cached policies to determine bandwidth allocation when possible. If a policy is not found in the cache, local decision points 122, 121, and 123 obtain the needed policy from policy server 110.

In operation, enterprise network 100 uses bandwidth management based on global policies to improve the allocation of bandwidth in wide area network 102. The operation of the bandwidth allocation function of enterprise network 100 is described in terms of a request from a user of LAN 104-1. Initially, the user on LAN 104-1 requests bandwidth in wide area network 102 to use service available at location 150.

The request is received at the data port of service delivery unit 108. Service delivery unit 108 classifies the request, e.g., identifies the user by IP address, identifies the type of service requested. Next, service delivery unit 108 retrieves the policies necessary to process the request. These global policies may be retrieved from local decision point 122 if previously cached, or may be obtained directly from policy server 110.

Based on the retrieved policies, service delivery unit 108 takes action to allocate bandwidth to the user. In one embodiment, the policies implemented by service delivery unit 108 control the allocation of bandwidth based on the priority of the request and the availability and type of bandwidth needed. To accomplish this, service delivery unit 108 determines the amount and type of bandwidth requested, the priority for the request, whether sufficient bandwidth is available, and when sufficient bandwidth is available, selectively assigns bandwidth to the user based on the policies.

II. Service Delivery Unit

Figure 2 is a block diagram of an embodiment of a service delivery unit, indicated generally at 200, and constructed according to the teachings of the present invention. Service delivery unit 200 provides functionality of a point of demarcation

between the local networks and the wide area network. Advantageously, service delivery unit 200 also provides bandwidth management for the wide area network (WAN) side of the enterprise network. This bandwidth management function utilizes global policies stored in a policy server to control the allocation of bandwidth in the wide area network so that the valuable WAN bandwidth resources are used effectively.

Service delivery unit 200 includes central processing unit 208 that executes instructions to perform global policy based bandwidth management for access to the wide area network of the enterprise network. Central processing unit 208 receives inputs from a number of different ports in providing this bandwidth management function. Each of these ports is discussed in turn.

Service delivery unit 200 includes at least one network interface port 202. Network interface port 202 provides a connection point for the wide area network. Typically, network interface port 202 is coupled to the wide area network over, e.g., a T1, or E1 line. Network interface port 202 thus provides a port to communicate data with the wide area network. It is the bandwidth available through this port 202 that is controlled by the policy based bandwidth management of service delivery unit 200.

Service delivery unit 200 further includes at least one data port 204. Data port 204 provides a connection point for a number of local area networks to communicate with the wide area network through service delivery unit 200. Data port 204 typically handles data over a V.35 physical interface although other physical interfaces can also be used. Requests for access to the wide area network are also received through data port 204.

Service delivery unit 200 further may include drop and insert port 206. Drop and insert port 206 is similar to network interface port 206 in terms of physical interface. Drop and insert port 206 allows unused (provisioned for voice or video) part of the WAN link to be given to other enterprise applications, such as PBX or video conferencing equipment.

Service delivery unit also includes Ethernet port 210 and a control port serial interface 212. These ports can be used for management and control of service delivery unit 200. Ethernet port 210, in other embodiments, can use any appropriate protocol for local network access such as, Token Ring, Gigabit Ethernet.

5 Service delivery unit 200 also includes a logical “policy server interface port.”

This logical interface port for the policy server can be implemented on network interface port 202, Ethernet port 210, or data port 204. The logical interface port provides a connection point for a policy server. The policy server provides data regarding policies for bandwidth allocation to service delivery unit 200. Central
10 processing unit 208 caches the policy results received at port 206 such that policy results are retrieved from the server only when the necessary policy results are not in the cache for a particular request.

Data is stored in service delivery unit 200 in memory circuits 214. Memory circuits 214 may comprise, for example, a combination of persistent and non-
15 persistent memory such as a mixture of dynamic random access memory and flash memory. Memory circuits 214 store the operating instructions for central processing unit 208 and thus store the program code used to control bandwidth allocation by service delivery unit 200.

The operation of service delivery unit 200 is described by reference to Figures
20 3 and 4 below.

Figure 3 is a flow chart that illustrates an embodiment of a process for communicating data from a wide area network to a local area network through a service delivery unit according to the teachings of the present invention. At block 300, the method receives data from network interface port 202 and performs physical
25 layer termination and monitoring functions. Block 300 also supports drop and insert functionality. This includes separating the data meant for the enterprise data network, the enterprise voice network and other applications such as Video Conferencing. Data meant for the enterprise data network is sent to block 302 while data meant for voice and video applications are sent to the appropriate physical ports at block 320.

Service delivery unit 200 performs link layer interface and monitoring functions at block 302. For example, for Frame Relay service, the service delivery unit 200 may perform all features aimed at supporting Frame Relay interface and validating SLA parameters. The SLA validation function may include non-intrusive
5 and intrusive monitoring that is necessary to validate layer 2 service.

In block 324, data from multiple link layer connections, such as PVC for Frame Relay, is sent to the appropriate Abstract Service Layer Devices (ASLD). The ASLD allows the higher protocol and application layers to be independent of the lower (physical and link) layers. This architectural feature allows multiple physical
10 network interfaces supporting different service delivery methods (e.g., Frame Relay, ATM, PPP) to be supported on the same service delivery unit simultaneously without changing higher layer support. For each ASLD block 324, there are corresponding 322, 304, and 306 blocks.

Service delivery unit 200 optionally decrypts data packets at block 322. For
15 example, for running mission critical data over non-secure connections, such as Public IP, encryption and tunneling supported by IPSec protocol may be used to ensure data security. This function may be done in either software or using a hardware module.

Service delivery unit 200 further validates data packets at block 304. For example, service delivery unit 200 validates the type and version of the IP protocol,
20 the checksum, length and basic format of the packet. It is understood that service delivery unit 200 can perform other validation as necessary for the policies used for bandwidth management.

In this case, the packets are being transmitted over the wide area network to a recipient on a local area network. The local IP address for the intended recipient may
25 be different from the public IP address of the received packet. Thus, at block 306, service delivery unit 200 translates the public IP address/port to an internal IP address/port for the packet, if necessary. This is referred to as network address translation (NAT).

At block 308, service delivery unit 200 evaluates the packet to determine type of protocol, source and destination users, type of application, and any other information necessary to ascertain the internal state (part of a normal state transition) of the active application. This information is used for real-time and historical reporting along with policy lookup. Service delivery unit 200 may use appropriate industry standard (remote monitoring (RMON) and RMON II) and custom methods for reporting data gathered in block 308.

At block 310, service delivery unit 200 performs policy enforcement for the packets received at network interface port 202. Based on the users and application data gathered in block 308, service delivery unit 200 determines if this is a new session (conversation) or an existing session. For all new sessions (policy decision is not checked for an existing session), block 310 asks the local decision point (LDP), block 312, for matching policy results. Due to the dynamic nature of today's enterprise, the network usage is constantly changing and results of a policy will in fact change based on time of the day, day of the week, health of the network and other network users. Block 310 receives the policy results from LDP block 312 and performs the queuing or flow control as appropriate for the protocol and passes the data to the appropriate next processing block. Block 310 has the functionality for monitoring the bandwidth allocated to the user and the type of use, e.g., Internet page, intranet page, e-mail, voice, video conference, or the like, to assure that the allocated bandwidth is not exceeded. If the packet is destined for the service delivery unit 200, the packet is sent to block 318. If the packet is destined for other devices in the enterprise network, then the packet is sent to block 314 for further processing.

The local policy decision (LDP) functionality is in block 312. On request from block 310, LDP block 312 examines the local policy decision cache for a matching entry. In case the decision is not in the cache, block 312 communicates with the policy server to get the appropriate decision. The policy decision is then sent to the Policy Enforcement Point (PEP), block 310, and the local cache is updated for all future references.

The data port link layer management is handled by block 314 and the physical layer port management is handled by block 316. Blocks 314 and 316 provide similar functionality as provided by blocks 300 and 302.

At block 318, packets destined for the service delivery unit 200 are processed.

- 5 They are expected to include various device management functions, device-policy server synchronization functions and authentication token synchronization services.

Figure 4 is a flow chart that illustrates an embodiment of a process for communicating data from the local area network to a wide area network through a service delivery unit according to the teachings of the present invention. At block 10 400, the method receives data from data port 204. Service delivery unit 200 performs a monitoring function at block 402. For example, service delivery unit 200 uses Frame Vision to perform Frame Relay functionality to process the data received from the local area network and to perform layer 2 monitoring of the same data.

Service delivery unit 200 further validates data packets at block 404. For 15 example, service delivery unit 200 validates the type and version of the IP protocol, the checksum, length and basic format of the packet. It is understood that service delivery unit 200 can perform other validation as necessary for the policies used for bandwidth management.

At block 406, service delivery unit 200 evaluates the packet to determine type 20 of protocol, source and destination users, type of application, and any other information necessary to ascertain the internal state (part of a normal state transition) of the active application. This information is used for real-time and historical reporting along with policy lookup. Service delivery unit will use appropriate industry standard (RMON and RMON II) and custom methods for reporting data gathered in 25 block 406.

At block 408, service delivery unit 200 performs policy enforcement for the packets received at data port 204. Based on the users and application data gathered in block 406, service delivery unit 200 determines if this is a new session (conversation) or an existing session. For all new sessions (policy decision is not checked for an

existing session), block 408 asks the LDP, block 410, for matching policy results.

Due to the dynamic nature of today's enterprise, the network usage is constantly changing and results of a policy may in fact change based on time of the day, day of the week, health of the network and other network users. Block 408 receives the policy results from LDP block 410 and performs the bandwidth enforcement function. This includes end-to-end application queuing or flow control as appropriate for the protocol as well as re-mapping the packet header to get appropriate priority within the service provider's network. For example, the re-mapping may include the Type of Service (TOS) field in packet header. The data is then sent to the appropriate next processing block. Block 408 has the functionality for monitoring the bandwidth allocated to the user and the type of use, e.g., Internet page, intranet page, e-mail, voice, video conference, or the like, to assure that the allocated bandwidth is not exceeded. If the packet is destined for the service delivery unit, the packet is sent to block 424. If the packet is destined for other devices in the enterprise network, then the packet is sent to block 412 for further processing.

At block 412, service delivery unit 200 performs service mapping function for the packets received at data port 202. The service mapping function provides an alternative to running all enterprise applications over a single high bandwidth expensive connection between two enterprise sites by replacing them with multiple less expensive connections. The service mapping function allows service delivery unit 200 to optimize data delivery between enterprise locations by matching applications and users with connections with appropriate SLAs. An example may include three connections between two enterprise locations.

1. Connection A has a premium SLA (this may include CIR=256 KBPS, latency=5 microseconds and delay=5 microseconds),
2. Connection B has a medium SLA (this may include CIR=64 KBPS, latency=15 microseconds and delay=15 microseconds),
3. Connection C has a low SLA (this may include CIR=0 KBPS, latency=50 microseconds and delay=100 microseconds),

In this example, service mapping block 412 utilizes the classification data from block 406 to send, for example, mission critical SAP traffic on Connection A, Intranet Web traffic on Connection B and electronic mail and Internet Web browsing on Connection C.

5 The use of service mapping approach avoids Internet and Intranet Web traffic from impacting mission critical SAP traffic.

In this case, the packets are being transmitted over the wide area network to a recipient on a local area network. The local IP address for the intended recipient may be different from the public IP address of the received packet. Thus, at block 414,
10 service delivery unit 200 translates the intended IP to public IP address/port for the packet, if necessary.

Service delivery unit 200 optionally encrypts data packets at block 416. For example, for running mission critical data over non-secure connections, such as Public IP, encryption and tunneling supported by IPSec protocol may be used to ensure data
15 security. This function may be done in either software or using a hardware module.

In block 418, data from multiple link layer connections, such as PVC for Frame Relay, is sent to the appropriate Abstract Service Layer Devices (ASLD). The ASLD allows the higher protocol and application layers to be independent of the lower (physical and link) layers. This architectural feature allows multiple physical
20 network interfaces supporting different service delivery methods (Frame Relay, ATM, PPP, etc.) to be supported on the same service delivery unit simultaneously without changing higher layer support.

Service delivery unit 200 performs link layer interface and monitoring function at block 420. For example, for Frame Relay service, the service delivery unit 200
25 would perform all features aimed at supporting Frame Relay interface and validating SLA parameters. The SLA validation function would include non-intrusive and intrusive monitoring that is necessary to validate layer 2 service.

At block 422, the method transmits data to network interface port 202 and performs physical layer termination and monitoring function. The block also supports

drop and insert functionality. This includes separating the data meant for the enterprise data network, the enterprise voice network and other applications such as Video Conferencing. Data meant for the enterprise data network is sent to block 426 while data meant for voice and video applications are sent to the appropriate physical ports.

Conclusion

Although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiment shown. This application is intended to cover any adaptations or variations of the present invention. The service delivery unit described provides bandwidth management in a wide area network portion of an enterprise network based on global policies. The actual policies implemented in a particular application can be adjusted to meet the needs of the enterprise network. The policies can consider factors other than the use of the bandwidth and the priority of the use or the user. Further, the functionality of the router in Figure 1 can be incorporated into the service delivery unit. Further, the service delivery unit can also include functionality for providing a firewall.

What is claimed is:

1. An enterprise network comprising:
 - a plurality of local area networks;
 - at least one service delivery unit having a data port and a network interface
 - 5 port;
 - the network interface port coupled to a wide area network;
 - the data port coupled to the plurality of local area networks; and
 - a policy server, communicatively coupled to the at least one service delivery
 - unit, the policy server including policies for bandwidth allocation stored on a
 - 10 computer readable medium, such that the service delivery unit selectively allocates
 - bandwidth to users based on the policies stored in the policy server.
2. The enterprise network of claim 1, and further including a router coupled
- 15 between the data port and the plurality of local area networks.
3. The enterprise network of claim 1, wherein the data port is coupled to the
- local area network over an Ethernet connection.
4. The enterprise network of claim 1, wherein the at least one service delivery
- 20 unit includes a cache that stores policies retrieved from the policy server.
5. The enterprise network of claim 1, wherein the policy server includes at least
- two servers that are located at geographically different locations in the enterprise
- network.
- 25 6. The enterprise network of claim 5, wherein service delivery units that are
- located at geographically different locations from the at least two servers communicate
- with one of the at least two servers over a permanent virtual connection in the wide
- area network.

7. The enterprise network of claim 6, and wherein the permanent virtual connection comprises a secure connection.

8. The enterprise network of claim 1, wherein the at least one service delivery unit includes router functionality.

9. The enterprise network of claim 1, wherein the policies stored on the policy server include data that the at least one service delivery unit uses to prioritize access to bandwidth over the wide area network and to control the amount of bandwidth allocated for each request.

10. The enterprise network of claim 1, wherein the at least one service delivery unit uses service mapping in allocating bandwidth to a user based on the policies stored on the policy console.

11. A service delivery unit, comprising:
a network interface port coupleable to a wide area network;
a data port coupleable to a plurality of local area networks;
a policy server interface coupleable to a policy server that includes policies for bandwidth allocation stored on a computer readable medium; and
a central processing unit, communicatively coupled to the network interface port, the data port and the policy server interface, wherein the central processing unit executes instructions to selectively allocate bandwidth in the wide area network for users of the plurality of local area networks based on the policies stored in the policy server.

12. The service delivery unit of claim 11, wherein the central processing further executes instructions to perform router functions for the data port.

13. The service delivery unit of claim 11, and further comprising a cache for caching policies retrieved from the policy server.

14. The service delivery unit of claim 11, wherein the network port comprises an interface that is coupleable to communicate with the wide area network over a number of permanent virtual connections.

15. The service delivery unit of claim 11, wherein the central processing unit uses service mapping to allocate bandwidth.

10

16. An enterprise network comprising:

at least one local area network at a first geographic location;

at least one additional local area network at a second, different geographic location;

15 a first service delivery unit having a data port that is coupled to the at least one local area network and a network interface port that is coupled to a wide area network;

a second service delivery unit having a data port that is coupled to the at least one additional local area network and a network interface port that is coupled to the wide area network; and

20

a policy server, communicatively coupled to the first and second service delivery units, the policy server including policies for bandwidth allocation stored on a computer readable medium, such that the service delivery units selectively allocate bandwidth to users based on the policies stored in the policy server.

25

17. A method for providing bandwidth management in an enterprise network, the method comprising:

receiving a request for connection over a wide area network;

classifying the request;

identifying global policies that relate to the request; and
applying the identified policies to control the priority and amount of bandwidth
to allocate to the request over the wide area network.

5 18. The method of claim 17, wherein classifying the request comprises:
identifying the user by IP address; and
identifying the type of request.

10 19. The method of claim 17, wherein identifying policies comprises:
identifying policies in a cache of a service delivery unit; and
when applicable policies are not found in the cache, requesting additional
policies from a policy server.

15 20. The method of claim 19, wherein requesting additional policies from the policy
server comprises communicating with the policy server over a secure permanent
virtual connection.

20 21. The method of claim 17, wherein applying the identified policies comprises:
determining the amount and type of bandwidth requested;
determining the priority for the request;
determining whether sufficient bandwidth is available; and
when sufficient bandwidth is available, selectively assigning bandwidth to the
user based on the policies.

Variable	Control		Treated		P-value
	Mean	SD	Mean	SD	
Age (years)	50.2	10.5	50.1	10.3	0.95
Weight (kg)	75.3	15.2	75.1	15.1	0.98
Height (cm)	178.5	6.8	178.4	6.7	0.92
BMI (kg/m ²)	24.1	3.2	24.0	3.1	0.96
SBP (mmHg)	135.2	12.5	134.8	12.3	0.89
DBP (mmHg)	85.1	8.2	84.9	8.1	0.91
HR (b/min)	72.3	10.1	72.1	10.0	0.93
ECG normal	15		16		0.87
ECG abnormal	15		14		
ECG normal	15		15		0.94
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
ECG abnormal	15		15		
ECG normal	15		15		0.91
ECG abnormal	15		15		
ECG normal	15		15		0.93
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
ECG abnormal	15		15		
ECG normal	15		15		0.91
ECG abnormal	15		15		
ECG normal	15		15		0.93
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
ECG abnormal	15		15		
ECG normal	15		15		0.91
ECG abnormal	15		15		
ECG normal	15		15		0.93
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
ECG abnormal	15		15		
ECG normal	15		15		0.91
ECG abnormal	15		15		
ECG normal	15		15		0.93
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
ECG abnormal	15		15		
ECG normal	15		15		0.91
ECG abnormal	15		15		
ECG normal	15		15		0.93
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
ECG abnormal	15		15		
ECG normal	15		15		0.91
ECG abnormal	15		15		
ECG normal	15		15		0.93
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
ECG abnormal	15		15		
ECG normal	15		15		0.91
ECG abnormal	15		15		
ECG normal	15		15		0.93
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
ECG abnormal	15		15		
ECG normal	15		15		0.91
ECG abnormal	15		15		
ECG normal	15		15		0.93
ECG abnormal	15		15		
ECG normal	15		15		0.90
ECG abnormal	15		15		
ECG normal	15		15		0.92
EC					

5

10

"Express Mail" mailing label number: EL67292504US
 Date of Deposit: FEB. 28, 2000
 I hereby certify that this paper or fee is being deposited with the
 United States Postal Service "Express Mail Post Office to Addressee"
 service under 37 CFR 1.10 on the date indicated above and is
 addressed to the Assistant Commissioner for Patents,
 Washington, D.C. 20231
 Printed Name: SHAWN HISE
 Signature: [Signature]

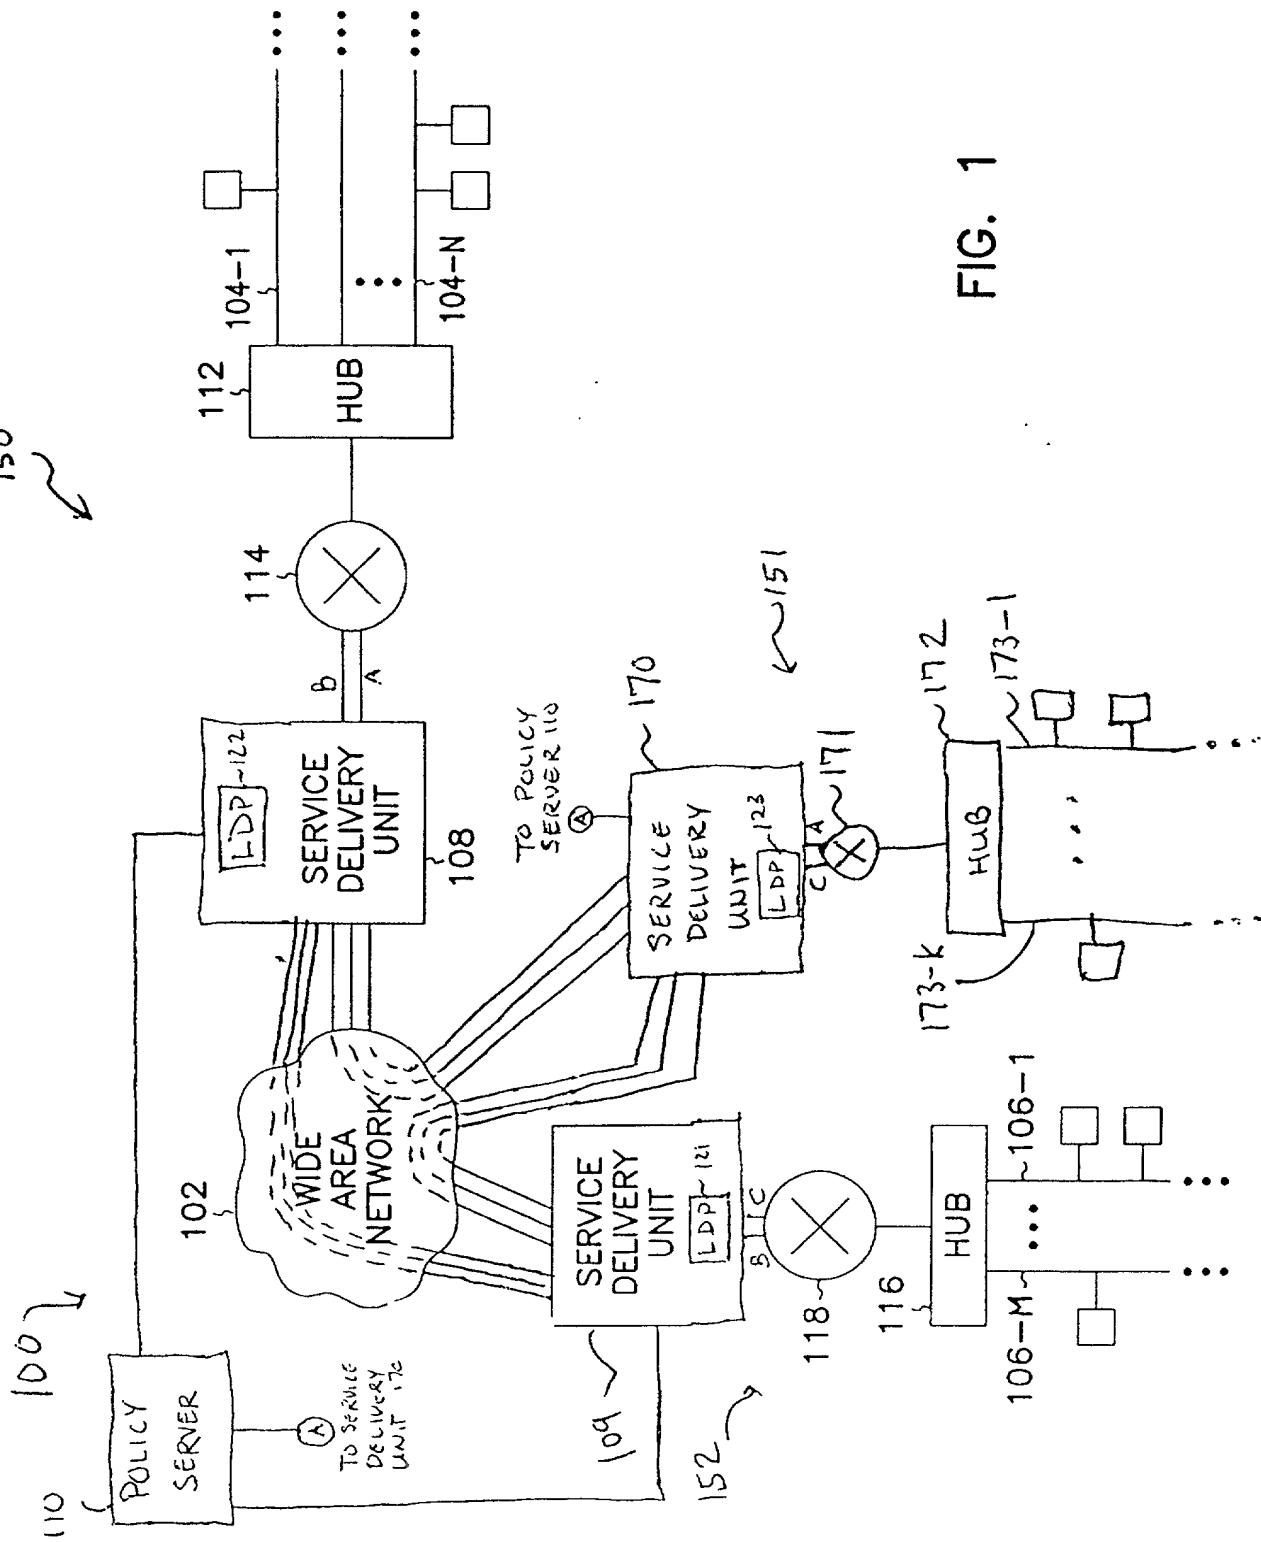


FIG. 1

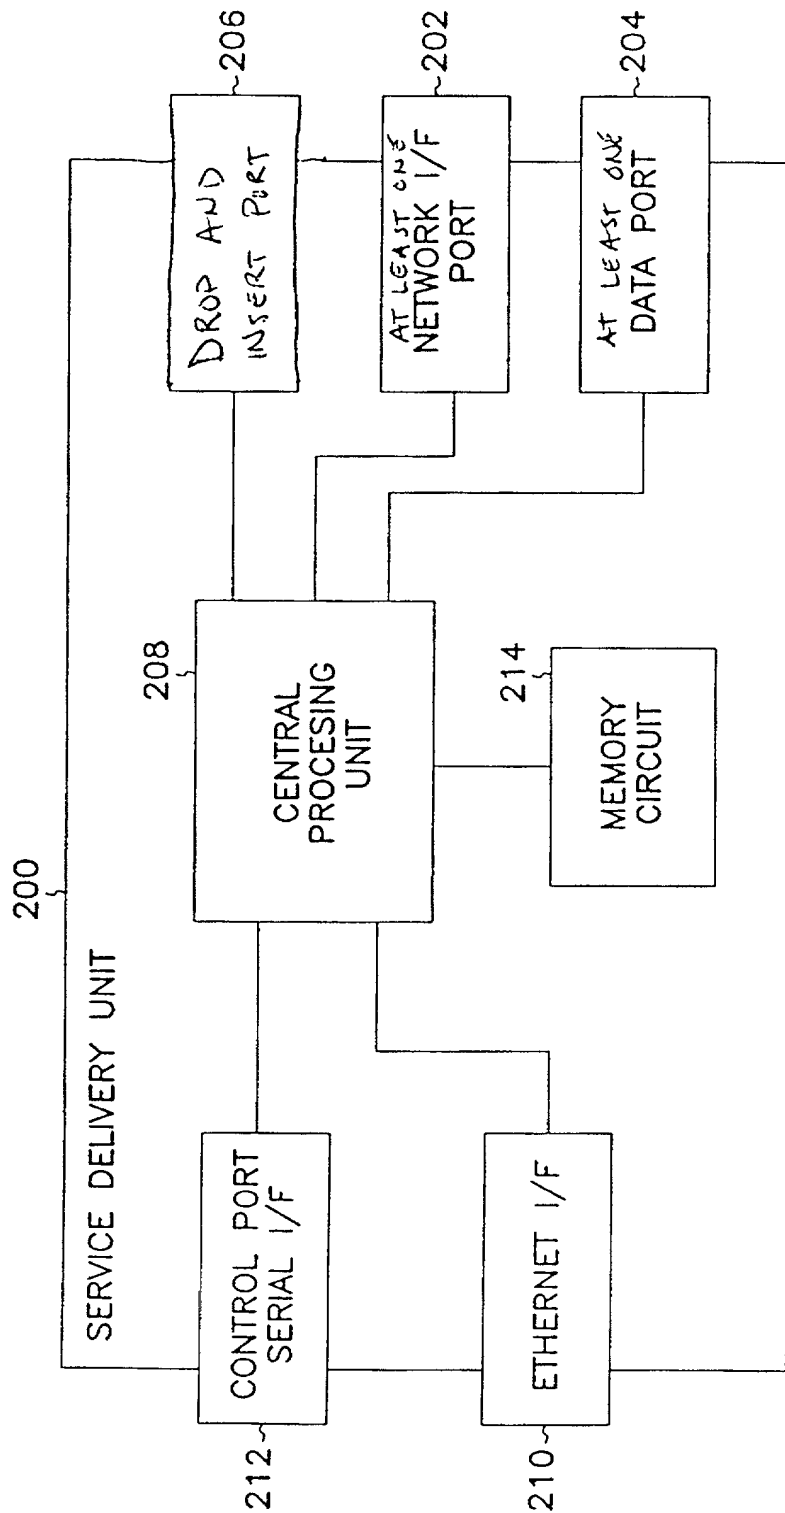


FIG. 2

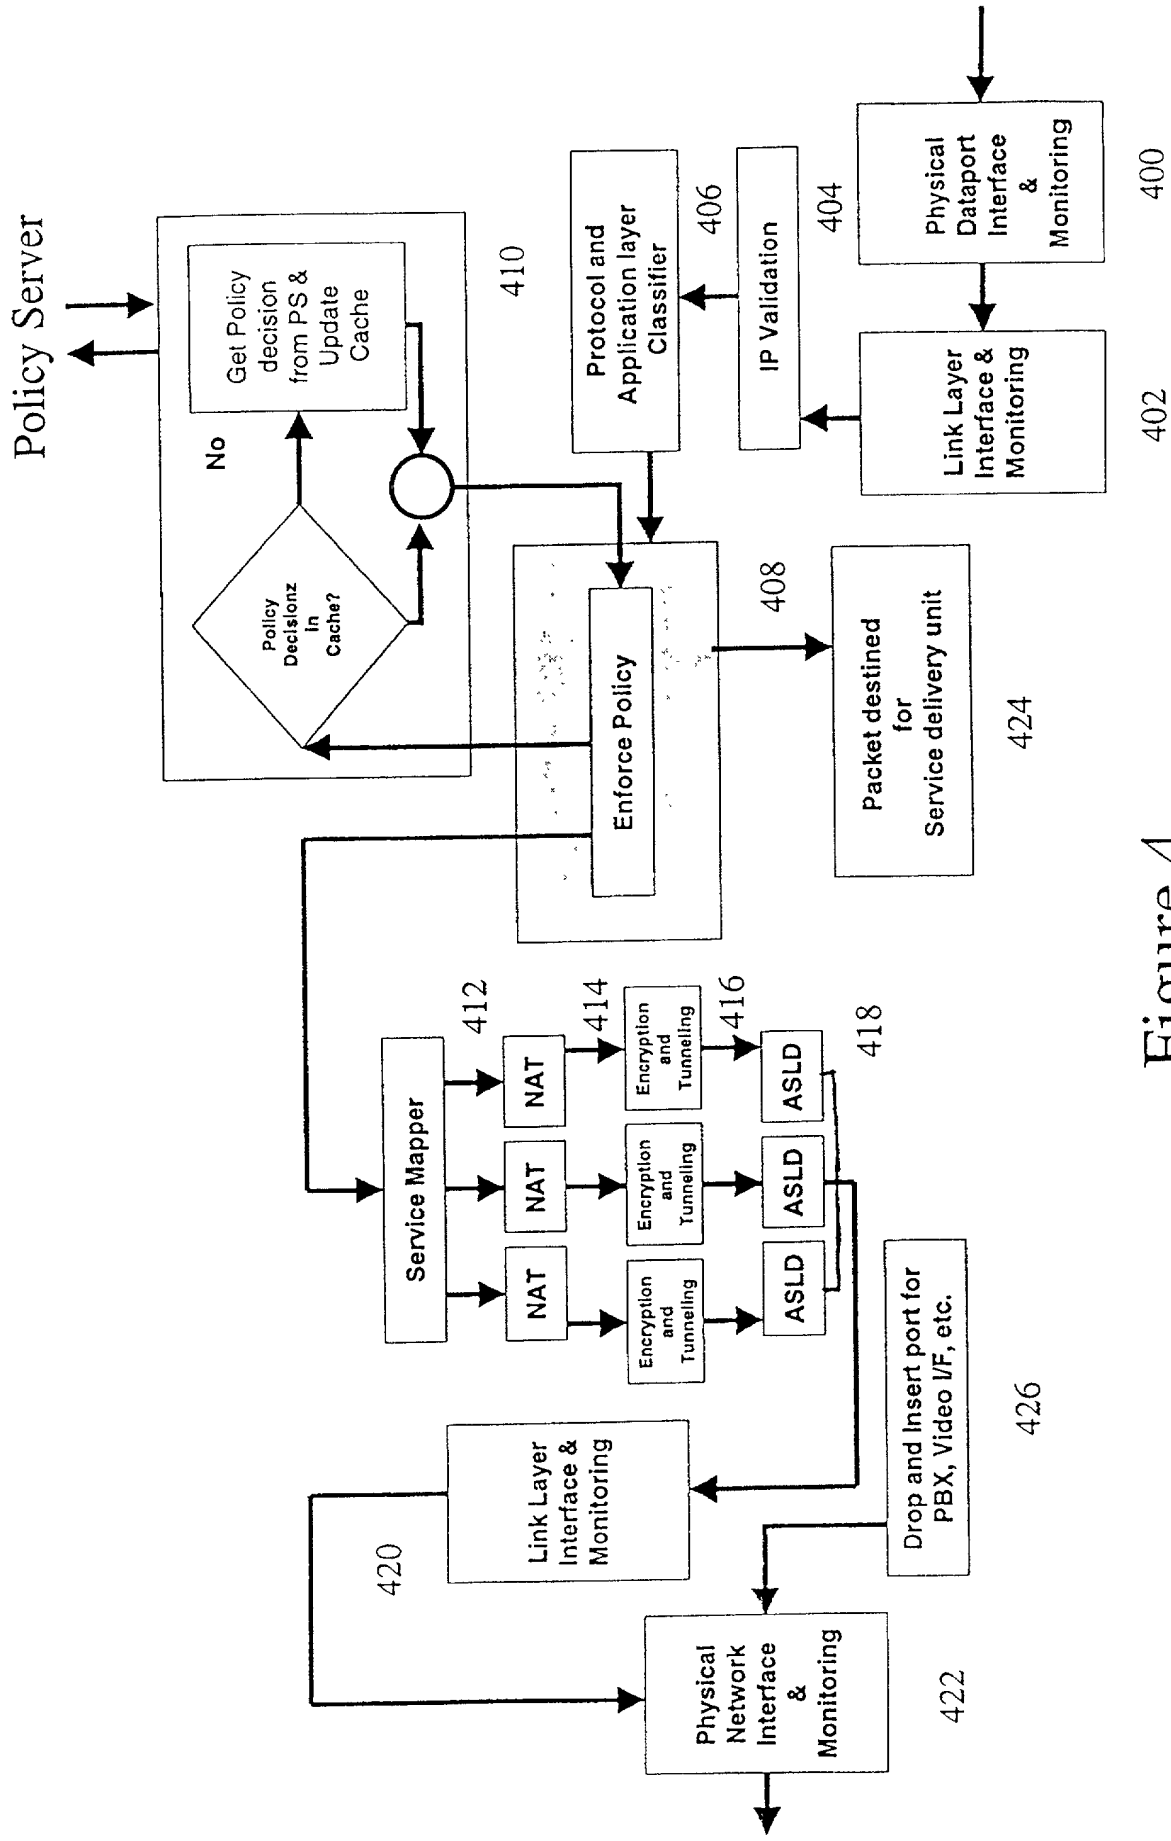


Figure 4

SCHWEGMAN, LUNDBERG, WOESSNER & KLUTH, P.A.

United States Patent Application

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **SERVICE DELIVERY UNIT FOR AN ENTERPRISE NETWORK**.

The specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 C.F.R. § 1.56 (attached hereto). I also acknowledge my duty to disclose all information known to be material to patentability which became available between a filing date of a prior application and the national or PCT international filing date in the event this is a Continuation-In-Part application in accordance with 37 C.F.R. § 1.63(e).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on the basis of which priority is claimed:

No such claim for priority is being made at this time.

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

No such claim for priority is being made at this time.

I hereby claim the benefit under 35 U.S.C. § 120 or 365(c) of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. § 1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Number
09/342,682

Filing Date
June 29, 1999

Status
Pending

I hereby appoint the following attorney(s) and/or patent agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Adams, Gregory J.	Reg. No. 44,494	Jurkovich, Patti J.	Reg. No. 44,813	Nielsen, Walter W.	Reg. No. 25,539
Anglin, J. Michael	Reg. No. 24,916	Kalis, Janal M.	Reg. No. 37,650	Oh, Allen J.	Reg. No. 42,047
Bianchi, Timothy E.	Reg. No. 39,610	Kaufmann, John D.	Reg. No. 24,017	Padys, Danny J.	Reg. No. 35,635
Billion, Richard E.	Reg. No. 32,836	Klima-Silberg, Catherine I.	Reg. No. 40,052	Parker, J. Kevin	Reg. No. 33,024
Black, David W.	Reg. No. 42,331	Kluth, Daniel J.	Reg. No. 32,146	Peacock, Gregg A.	Reg. No. 45,001
Brennan, Leoniede M.	Reg. No. 35,832	Lacy, Rodney L.	Reg. No. 41,136	Perdok, Monique M.	Reg. No. 42,989
Brennan, Thomas F.	Reg. No. 35,075	Leffert, Thomas W.	Reg. No. 40,697	Polglaze, Daniel J.	Reg. No. 39,801
Brooks, Edward J., III	Reg. No. 40,925	Lemaire, Charles A.	Reg. No. 36,198	Prout, William F.	Reg. No. 33,995
Chu, Dinh C.P.	Reg. No. 41,676	Litman, Mark A	Reg. No. 26,390	Schumm, Sherry W.	Reg. No. 39,422
Clark, Barbara J.	Reg. No. 38,107	Lundberg, Steven W.	Reg. No. 30,568	Schwegman, Micheal L.	Reg. No. 25,816
Dahl, John M.	Reg. No. 44,639	Mack, Lisa K.	Reg. No. 42,825	Slifer, Russell D.	Reg. No. 39,838
Drake, Eduardo E.	Reg. No. 40,594	Maeyaert, Paul L	Reg. No. 40,076	Smith, Michael G.	Reg. No. 45,368
Eliseeva, Maria M.	Reg. No. 43,328	Maki, Peter C.	Reg. No. 42,832	Speier, Gary J.	Reg. No. P-45,458
Embretson, Janet E.	Reg. No. 39,665	Malen, Peter L.	Reg. No. 44,894	Steffey, Charles E.	Reg. No. 25,179
Fogg, David N.	Reg. No. 35,138	Mates, Robert E.	Reg. No. 35,271	Terry, Kathleen R.	Reg. No. 31,884
Fordenbacher, Paul J.	Reg. No. 42,546	McCrackin, Ann M.	Reg. No. 42,858	Tong, Viet V.	Reg. No. P-45,416
Forrest, Bradley A	Reg. No. 30,837	Nama, Kash	Reg. No. 44,255	Viksnins, Ann S.	Reg. No. 37,748
Harris, Robert J.	Reg. No. 37,346	Nelson, Albin J.	Reg. No. 28,650	Woessner, Warren D.	Reg. No. 30,440
Huebsch, Joseph C.	Reg. No. 42,673				

I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization/who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Schwegman, Lundberg, Woessner & Kluth, P.A. to the contrary.

Please direct all correspondence in this case to **Schwegman, Lundberg, Woessner & Kluth, P.A.** at the address indicated below:

P.O. Box 2938, Minneapolis, MN 55402

Telephone No. (612)373-6900

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of joint inventor number 1 : **Scott Sarnikowski**

Citizenship: **United States of America**

Residence: **San Jose, CA**

Post Office Address: **5347 Silver Point Way
San Jose, CA 95138**

Signature: _____
Scott Sarnikowski

Date: _____

Full Name of joint inventor number 2 : **Anirudha Chinmulgund**

Citizenship: **India**

Residence: **San Jose, CA**

Post Office Address: **7181 Brisbane Court
San Jose, CA 95129**

Signature: _____
Anirudha Chinmulgund

Date: _____

☒ Additional inventors are being named on separately numbered sheets, attached hereto.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of joint inventor number 3 : **Sanjay Ravindra**

Citizenship: **India**

Residence: **San Jose, CA**

Post Office Address: 1919 Fruitdale Ave.
Apt. J-624
San Jose, CA 95128

Signature: _____ Date: _____
Sanjay Ravindra

Full Name of joint inventor number 4 : **Manoj Kulkarni**

Citizenship: **India**

Residence: **Cupertino, CA**

Post Office Address: 20800 Valley Green Drive
#423
Cupertino, CA 95014

Signature: _____ Date: _____
Manoj Kulkarni

Full Name of joint inventor number 5 : **Anil Lakhwara**

Citizenship: **United States of America**

Residence: **San Francisco, CA**

Post Office Address: 154 Lombard Street
#3
San Francisco, CA 94111

Signature: _____ Date: _____
Anil Lakhwara

Full Name of joint inventor number 6 : **John Litster**

Citizenship: **Canada**

Residence: **Beaverton, OR**

Post Office Address: 7130 SW Tierra Del Mar Drive
Beaverton, OR 97007-5107

Signature: _____ Date: _____
John Litster

☒ Additional inventors are being named on separately numbered sheets, attached hereto.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of joint inventor number 7 : **Harikrishin W. Hirani**

Citizenship: **United States of America**

Residence: **Los Altos, CA**

Post Office Address: **1351 Country Club Drive
Los Altos, CA 94024**

Signature: _____ Date: _____
Harikrishin W. Hirani

Full Name of inventor:

Citizenship:

Residence:

Post Office Address:

Signature: _____ Date: _____

Full Name of inventor:

Citizenship:

Residence:

Post Office Address:

Signature: _____ Date: _____

Full Name of inventor:

Citizenship:

Residence:

Post Office Address:

Signature: _____ Date: _____

§ 1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
 - (i) Opposing an argument of unpatentability relied on by the Office, or
 - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.